


CAT6A Class EA RJ45 plug to be assembled in the field

- FTP TYPE: 1 piece Design
- Easy Assembly - easily terminated in the field in 2 minute without any special tools
- Operation temperature:-40 °C to 60 °C, Relative humidity: 85%(30 °C), Air pressure: 70-106Kpa.
- Gold Plated Phosphor Bronze Blade: phosphor bronze and gold plating (3~50uinch), mating durability not less than 750 cycles ;
- Anti-burn performance: product made from Kirsite \ PC
- Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- Intensity of anti-currency: DC 1,000V (AC,700V), no puncture and flash-over phenomenon in one minute ;
- Retention strength: 7.7kg between jack and plug.
- Label: clear label to ensure easy to management ;
- Cable Jacket Diameter from 6 to 8.3 mm

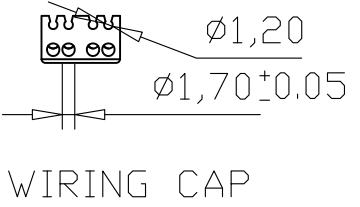

chromium plating

TITLE:			Copperled Technology Co.,Ltd			
	INCH	MM	TITLE: C t. T eld od le l g lee e			
.X	.015	.30	DRAWN BY: MA			
.XX	.010	.10	P/N: CL C			
.XXX	.005	.05	SCALE: 1:1			
CHECK BY:			UNIT: MM		REV:	
APPD BY:			SHEET: 1/1		DWG NO:	
			DATE: 2019/01/10			